


Структура заказного кода




Примечание: Некоторые преобразователи имеют двойной номинал, например NE300-4T0185G/0220PB

Размеры NE200

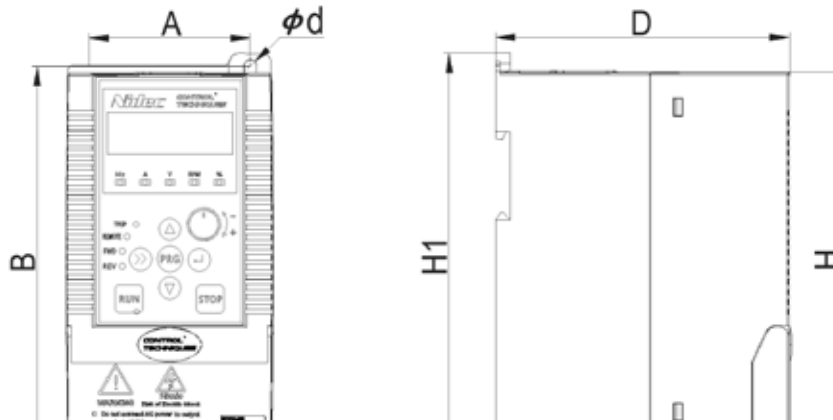

Модель G: Тяжелый режим P: Нормальн. режим	Заказной код	Выходной ток (А)	Мощность двигателя (кВт)	H Высота (мм)	W Ширина (мм)	D Глубина (мм)	H1 Высота (мм)	A (мм)	B (мм)	d (мм)
NE200-2S0004GB	01189010_E	2.5	0.4	150	83	120	166	65	153	5
NE200-2S0007GB	01189011_E	4.5	0.75							
NE200-2S0015GB	01189012_E	7	1.5							
NE200-4T0007G/015PB	01189013_E	2.5/4.0	0.75/1.5							
NE200-4T0015G/0022PB	01189014_E	4.0/6.0	1.5/2.2							
NE200-4T0022GB-M	01189015_E	6.0	2.2							
NE200-2S0022GB	01189016_E	10	2.2	200	120	140	215	98	202	5
NE200-4T0022G/0040PB	01189018_E	6.0/9.0	2.2/4.0							
NE200-4T0040G/0055PB	01189019_E	9.0/13.0								

Размеры NE300

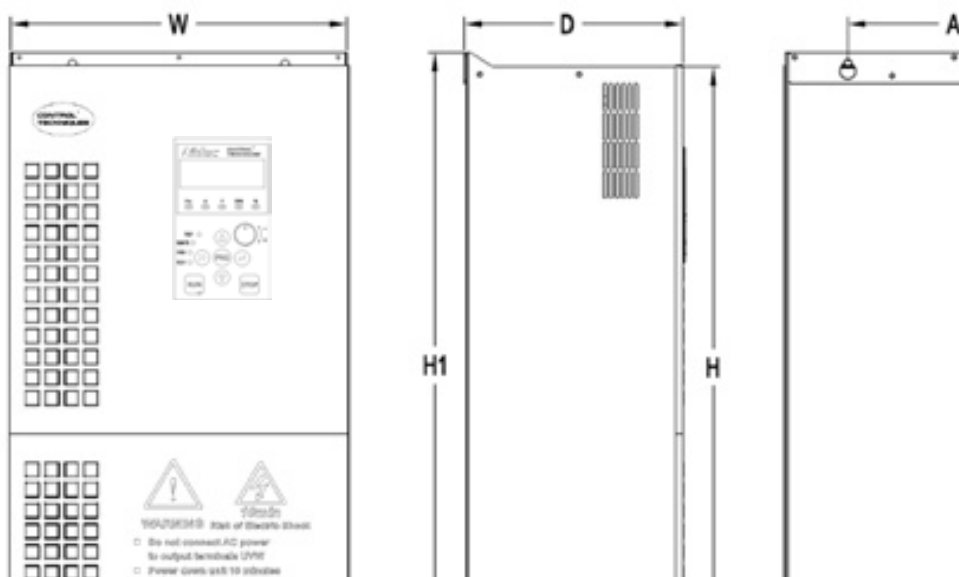

Заказные коды и размеры NE300:

Модель G: Тяжелый режим P: Нормальный режим	Заказной код	Выходной ток (А)	Мощность двигателя (кВт)	H Высота (мм)	W Ширина (мм)	D Глубина (мм)	H1 Высота (мм)	A (мм)	B (мм)	d (мм)
NE300-4T0015G/0022PB	01189020_E	4.0/6.0	1.5/2.2	210	133	180	238	108	225	7
NE300-4T0022G/0040PB	01189021_E	6.0/9.0	2.2/4.0							
NE300-4T0040G/0055PB	01189022_E	9.0/13	4.0/5.5							
NE300-4T0055G/0075PB	01189023_E	13/17	5.5/7.5	258	155	180	285	120	270	7
NE300-4T0075G/0110PB	01189024_E	17/25	7.5/11							
NE300-4T0110G/0150PB	01189025_E	25/32	11/15							
NE300-4T0150G/0185PB	01189027_E	32/37	15/18.5	308	192	186	340	150	323	7
NE300-4T0185G/0220PB	01189028_E	37/45	18.5/22							
NE300-4T0220G/0300PB	01189029_E	45/60	22/30							
NE300-4T0300G/0370P	01189032_E	60/75	30/37	425	270	200	450	200	430	7
NE300-4T0370G/0450P	01189033_E	75/90	37/45							
NE300-4T0450G/0550P	01189035_E	90/110	45/55	535	320	248	560	240	540	9
NE300-4T0550G/0750P	01189036_E	110/150	55/75							
NE300-4T0750G/0900P	01189037_E	150/176	75/90	640	380	248	665	240	640	9
NE300-4T0900G/1100P	01189038_E	176/210	90/110							
NE300-4T1100G/1320P	01189039_E	210/250	110/132							

Заказные коды и размеры NE300

Модель G: Тяжелый режим P: Нормальный режим	Заказной код	Выходной ток (А)	Мощность двигателя (кВт)	H Высота (мм)	W Ширина (мм)	D Глубина (мм)	H1 Высота (мм)	A (мм)	B (мм)	d (мм)
NE300-4T1320G/1600P-U	01189040_E	250/300	132/160	710	465	355	750	380	719	11
NE300-4T1320G/1600P-D	01189041_E	250/300	132/160							
NE300-4T1600G/1850P-U	01189042_E	300/340	160/185							
NE300-4T1600G/1850P-D	01189043_E	300/340	160/185							
NE300-4T1850G/2000P-U	01189044_E	340/380	185/200	859	550	385	900	440	868	11
NE300-4T1850G/2000P-D	01189045_E	340/380	185/200							
NE300-4T2000G/2200P-U	01189046_E	380/420	200/220							
NE300-4T2000G/2200P-D	01189047_E	380/420	200/220							
NE300-4T2200G/2500P-U	01189048_E	420/470	220/250							
NE300-4T2200G/2500P-D	01189049_E	420/470	220/250							
NE300-4T2500G/2800P-U	01189050_E	470/540	250/280	1400	400	402	1455	460	1270	13
NE300-4T2500G/2800P-D	01189051_E	470/540	250/280							
NE300-4T1600G/1850P-F	01189052_E	300/340	160/185							
NE300-4T1850G/2000P-F	01189053_E	340/380	185/200							
NE300-4T2000G/2200P-F	01189054_E	380/420	200/220	1600	505	420	1655	560	1460	13
NE300-4T2200G/2500P-F	01189055_E	420/470	220/250							
NE300-4T2500G/2800P-F	01189056_E	470/540	250/280							
NE300-4T2800G/3150P-F	01189057_E	540/600	280/315							
NE300-4T3150G/3550P-F	01189058_E	600/660	315/355	1800	780	500	1870	840	1630	13
NE300-4T3550G/4000P-F	01189059_E	660/730	355/400							
NE300-4T4000G/4500P-F	01189060_E	730/840	400/450							
NE300-4T4500G/5000P-F	01189061_E	840/900	450/500							
NE300-4T5000G/5600P-F	01189062_E	900/950	500/560	1800	780	500	1870	—	—	—
NE300-4T5600G/6300P-F	01189063_E	950/1160	560/630							
NE300-4T6300G/7100P-F	01189064_E	1160/1300	630/710							
NE300-4T7100G/8000P-F	01189065_E	1300/1460	710/800							
NE300-4T8000G/9000P-F	01189066_E	1460/1640	800/900	1800	1560	500	1800	—	—	—
NE300-4T9000G-F	01189067_E	1640	900							

*-F шкафное исполнение со встроенным дросселем звена постоянного тока;

*-U подключение питания сверху, двигателя снизу;

*-D подключение питания снизу, двигателя сверху;

